

Propelaksler



Propelaksler er fremstillet af syrefast, rustfrit stål. Leveres med konus standard 1:10 ISO, rustfri feder, lukket bronzemøtrik med zink og rustfrit låseblik.


Diameter	20-22 mm	25 mm	28-30 mm	32-35 mm	38-40 mm	45 mm	50 mm	55-60 mm	65-70 mm
Længde	Inkl. moms	Inkl. moms	Inkl. moms	Inkl. moms	Inkl. moms	Inkl. moms	Inkl. moms	Inkl. moms	Inkl. moms
1000 mm	2.800,00	1.800,00							
1500 mm	3.200,00	2.200,00	2.500,00	3.180,00	4.590,00	6.100,00	7.630,00	10.910,00	15.200,00
2000 mm	3.800,00	2.800,00	3.000,00	3.690,00	5.220,00	7.120,00	8.870,00	13.770,00	17.850,00
2500 mm	4.100,00	3.300,00	3.600,00	4.710,00	6.375,00	8.280,00	10.180,00	15.200,00	19.890,00
3000 mm	4.400,00	3.900,00	4.400,00	5.220,00	7.120,00	9.560,00	11.420,00	16.520,00	21.620,00
4500 mm		4.600,00	4.700,00	7.650,00	10.180,00	12.440,00	16.010,00	24.170,00	29.270,00
6000 mm		6.000,00	6.200,00	10.180,00	12.750,00	16.320,00	17.850,00	28.050,00	37.940,00
Tillæg for ikke standard konus	800,00	800,00	1.000,00	1.250,00	1.500,00	1.750,00	2.000,00	2.500,00	3.200,00
Tildrejning af konus i forende af aksel inkl. møtrik og feder	1.800,00	1.800,00	2.000,00	2.500,00	3.000,00	3.500,00	4.000,00	5.500,00	7.600,00
Fræsning af notgang i forende, inkl. feder	1.250,00	1.250,00	1.500,00	1.600,00	1.700,00	1.880,00	2.100,00	2.600,00	3.300,00

For aksler af superstærkt Temet 25 stål og aksler på tommemål skal priserne ganges med 1,5.
Kontrol af gammel aksel for skævheder koster kr. 350,00.
For større dimensioner, forlang tilbud.

Aksel ISO Standard konus 1:10

D	d	L	G	Gevind P	Not	Feder Varenr.	Inkl. moms
25,0	19,5	55,0	25,0	M16x1,5	6x30	056506i	141,00
30,0	22,5	75,0	30,0	M20x1,5	8x30	056508i	141,00
35,0	26,5	85,0	30,0	M24x2	10x60	056510	196,00
40,0	30,5	95,0	35,0	M24x2	12x75	056512	196,00
45,0	34,5	105,0	40,0	M30x2	14x80	006 994	220,00
50,0	38,5	115,0	40,0	M36x3	14x80	006 994	220,00
60,0	46,5	135,0	40,0	M42x3	18x100	055518	350,00
65,0	50,5	145,0	40,0	M42x3	18x100	055518	350,00
70,0	54,5	155,0	55,0	M48x3	20x100	055520	400,00
75,0	58,5	165,0	55,0	M48x3	20x100	055520	400,00
80,0	62,5	175,0	70,0	M56x4	22x125	50680	500,00
90,0	70,5	195,0	75,0	M64x4	25x150	18011/1	625,00

Alle mål er i mm.

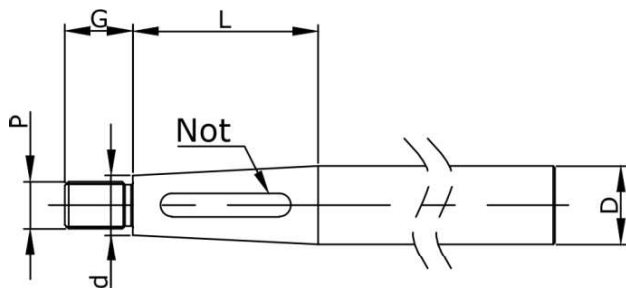

Propel ISO Standard konus 1:10

D	d	L	Not
25,0	19,0	60,0	6 mm
30,0	22,0	80,0	8 mm
35,0	26,0	90,0	10 mm
40,0	30,0	100,0	12 mm
45,0	34,0	110,0	14 mm
50,0	38,0	120,0	14 mm
60,0	46,0	140,0	18 mm
65,0	50,0	150,0	18 mm
70,0	54,0	160,0	20 mm
75,0	58,0	170,0	20 mm
80,0	62,0	180,0	22 mm
90,0	70,0	200,0	25 mm

Alle mål er i mm.

